



Technical Specification for Vented Lead-Acid Batteries (VLA)



1. Application

BAE *SECURA PVS solar* batteries are low maintenance and used to store electric energy in medium and large solar photovoltaic installations. Due to the robust tubular plate design BAE PVS batteries are excellent suited for highest requirement regarding cycling ability and long lifetime.

2. Technical data (Reference temperature 20 °C)


Type	C _{1h} Ah	C _{10h} Ah	C _{20h} Ah	C _{72h} Ah	C _{100h} Ah	C _{120h} Ah	C _{240h} Ah	R _i 1) mΩ	I _k 2) kA	Length mm	Width mm	Height mm	Weight (dry) kg	Weight (filled) kg
U _e [V per cell]	1.65	1.80	1.80	1.80	1.80	1.80	1.80							
2 PVS 140	54	111	128	156	160	162	166	1.90	1.27	105	208	420	9.3	14.3
3 PVS 210	79	162	187	226	231	234	240	1.27	1.62	105	208	420	11.3	16.3
4 PVS 280	99	201	232	278	285	286	295	0.95	2.16	105	208	420	12.5	17.0
5 PVS 350	127	257	298	358	366	369	379	0.76	2.70	126	208	420	15.2	21.0
6 PVS 420	156	317	368	444	454	458	470	0.63	3.24	147	208	420	17.8	25.0
5 PVS 550	211	371	414	475	488	496	528	0.70	2.90	126	208	535	20.0	27.0
6 PVS 660	263	468	522	604	620	628	669	0.58	3.48	147	208	535	22.8	32.0
7 PVS 770	306	543	606	700	718	729	777	0.50	4.06	168	208	535	26.4	37.0
6 PVS 900	359	670	752	900	933	944	976	0.47	4.32	147	208	710	32.7	46.0
8 PVS 1200	494	932	1,044	1,260	1,300	1,308	1,365	0.35	5.76	215	193	710	44.6	64.0
10 PVS 1500	589	1,090	1,226	1,468	1,510	1,536	1,588	0.28	7.20	215	235	710	54.3	75.9
12 PVS 1800	714	1,320	1,490	1,792	1,840	1,860	1,934	0.23	8.64	215	277	710	63.4	89.7
12 PVS 2280	882	1,670	1,866	2,181	2,250	2,280	2,397	0.22	9.18	215	277	855	75.4	110.0
16 PVS 3040	1,139	2,130	2,380	2,779	2,860	2,904	3,024	0.17	12.24	215	400	815	117.9	150.0
20 PVS 3800	1,470	2,780	3,100	3,643	3,750	3,804	3,984	0.14	15.30	215	490	815	127.0	187.0
22 PVS 4180	1,617	3,060	3,420	4,003	4,130	4,188	4,392	0.12	16.83	215	580	815	141.0	205.0
24 PVS 4560	1,814	3,470	3,880	4,564	4,710	4,776	5,016	0.11	18.36	215	580	815	146.0	218.8
26 PVS 4940	1,911	3,620	4,040	4,737	4,880	4,956	5,184	0.10	19.97	215	580	815	156.0	231.0

1) R_i and 2) I_k values according to IEC 60896-11


BAE *SECURA PVS solar* batteries as dry charged version are marked with "TG". e.g. 4 PVS 280 TG.

All values given in the table correspond to 100 % DOD. Please consider item 7.


3. Terminal position




2 PVS 140 to 6 PVS 900



8 PVS 1200 to 12 PVS 2280



16 PVS 3040



20 PVS 3800 to 26 PVS 4940

Technical Specification of BAE *SECURA PVS solar*

Terminals are designed as female poles with brass inlay M10 for flexible insulated copper cables with cross-section 25, 35, 50, 70, 95 or 120 mm² or insulated solid copper connectors with cross-section 90, 150 or 300 mm².

4. Design

Positive electrode	tubular-plate with a woven polyester gauntlet and solid grids in a corrosion-resistant PbSbSnSe-low antimony alloy
Negative electrode	grid-plate in a low antimony alloy with long life expander material
Separation	microporous separator
Electrolyte	sulphuric acid with a density of 1.24 kg/l at 20 °C
Container	high impact, transparent SAN (Styrol-Acrylic-Nitrile), UL-94 rating: HB
Lid	high impact, SAN in dark grey colour, UL-94 rating: HB
Plugs	labyrinth plugs for arresting aerosol, optional ceramic plugs or ceramic funnel plugs according to DIN 40740
Pole-bushing	100 % gas- and electrolyte-tight, sliding, plastic-coated "Panzerpol"
Kind of protection	IP 25 regarding DIN 40050, touch protected according to VBG 4

5. Installation

BAE *SECURA PVS solar* batteries are designed for indoor applications. For outdoor applications please contact BAE.


6. Maintenance

Every 6 months	check battery voltage as well as temperature
Every 12 months	check connections, record battery cell voltage as well as temperature
Every 3 years	average water-refilling interval (depending on utilization and ambient temperature)

7. Operational data

Depth of discharge (DOD)	max. 80 % ($U_e = 1.91$ V/cell for discharge times >10 h; 1.74 V/cell for 1 h) deep discharges of more than 80 % DOD have to be avoided
Charge current	unlimited, the minimal charge current has to be I_{10}
Charge voltage at cyclic operation	restricted from 2.30 V to 2.40 V per cell, operating instruction is to be observed
Floating voltage/non cyclic voltage	2.23 V/cell
Adjustment of charge voltage	no adjustment necessary if battery temperature is between 10 °C and 30 °C in the monthly average, otherwise $\Delta U/\Delta T = -0.003$ V/cell per K
Recharge to 100 %	within a period of 1 up to 4 weeks
IEC 61427 cycles	3150 (A+B)
Battery temperature	-20 °C to 55 °C, recommended temperature range 10 °C to 30 °C
Self-discharge	approx. 3 % per month at 20 °C

8. Number of cycles as function of DOD (Depth of discharge)

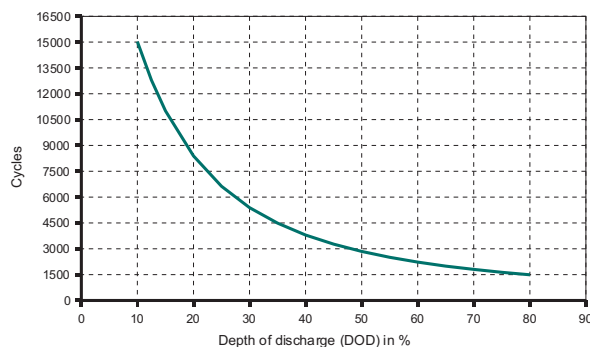

9. Transport

Batteries are not subject to ADR (road transport), if the conditions of special rule 598 (chapter 3.3) are observed.

10. Standards

Test standard	IEC 60896-11, IEC 61427
Safety standard, ventilation	EN 50272-2



BAE Batterien GmbH
 Wilhelminenhofstraße 69/70
 12459 Berlin · Germany
 P.O. Box 9 · 12442 Berlin
 Tel. +49 30 53001-661
 Fax +49 30 5354949
 E-mail: info@bae-berlin.de
 www.bae-berlin.de