



HIGH PERFORMANCE

EverExceed[®] Patented Robust AGM Technology



ST-12100
VALVE REGULATED
LEAD ACID BATTERY
FOR TELECOM / ELECTRIC
UTILITY APPLICATIONS
12V 100 AH @ 10 HR to 1.80VPC
12V 114 AH @ 20 HR to 1.75VPC


LONG DURATION

Features

- ☑ Thick positive plate design for maximum service float life 12 years design life @ 20°C(68°F).
- ☑ UL Recognized component.
- ☑ Valve regulated lead acid battery (VRLA).
- ☑ High-Compression Absorbed Glass Mat technology (AGM) for greater than 99% recombination efficiency.
- ☑ Operates at a low internal pressure.
- ☑ Heavy duty insert copper alloy terminals for ease of assembly, reduced maintenance and increased safety.
- ☑ Advanced lead tin calcium alloy, reduces grid corrosion and promotes long battery life.
- ☑ Over-sized, through the partition inter-cell welds provide low resistance connections, with minimal power loss.
- ☑ Flame arresting, low pressure safety release venting system for individual cells, recognized per U.L. 924.
- ☑ Multicell design for ease of installation and maintenance
- ☑ Horizontal or vertical operation.
- ☑ **Standard:**
Reinforced ABS (UL 94HB) container and cover
- ☑ **Optional:**
Flame-retardant reinforced ABS container and cover compliant with U.L.94 V-0 with an Oxygen limiting Index of greater than 28%.


12 VOLTS - 100 AMPERE HOUR @ 10 HOUR RATE										
AH Capacity to 1.80VPC @ 68°F (20°C)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.80	71.7	76.2	81.3	85.2	88.5	95.2	100	102	111	113

For Telecom / Electric Utility Applications



Standard Range VRLA

EverExceed[®]
power your applications

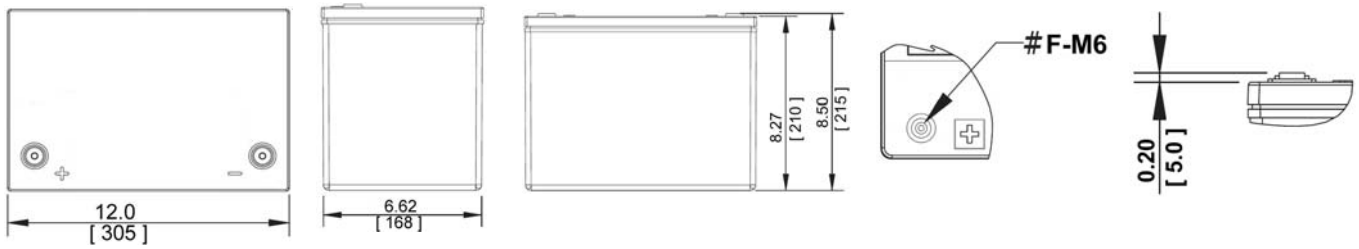

Length: 305mm Width: 168mm Height: 215mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum Discharge Current	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	69.4lbs 31.5kg	SG = 1.300	635 Amps	2900 Amps	0.0035

Capacity	114 Ah @ 20 hr. rate to 1.75 volts per cell @ 68°F (20°C). 100 Ah @ 10 hr. rate to 1.80 volts per cell @ 68°F (20°C).
Applicable Operating Temperature Range	-40°F (-40°C) to +140°F (60°C).
Ideal Operating Temperature Range	+68°F (+20°C) to +77°F (25°C).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 68°F~77°F (20°C~25°C).
Recommended Maximum Charging Current Limit	0.25C20 amperes (28.5 amperes @ 100% depth of discharge) @ 20 hr. rate.
Equalization and Cycle Service Charging Voltage	14.4 to 14.8 VDC/unit Average at 68°F~77°F (20°C~25°C).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 5.70 amperes RMS (C/20).
Self Discharge	EverExceed Standard Range batteries may be stored for up to 12 months at 68°F~77°F (20°C~25°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal
Terminal Hardware Initial Torque: Inserted Terminal	9 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	90.3	69.6	49.9	39.4	32.8	22.7	19.0	16.2	10.6	8.93
1.80	95.0	73.1	52.6	41.5	34.5	23.7	19.8	16.8	11.1	9.36
1.75	97.9	74.9	53.6	42.3	35.2	24.2	20.1	17.3	11.3	9.54

Constant Current Discharging Ratings - Amperes per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	44.7	35.9	25.5	20.1	16.6	11.3	9.40	8.17	5.30	4.51
1.80	47.8	38.1	27.1	21.3	17.7	11.9	10.0	8.48	5.54	4.69
1.75	48.5	39.0	27.8	21.8	18.0	12.3	10.3	8.72	5.70	4.84

Note: Batteries to be mounted with 0.5 in (1.25 cm) spacing minimum and free air ventilation.
Specifications subject to change without notification.

